



TRACK48 NV PRODUCT RANGE NEW PRODUCTS


We present to you: an overview of our new items in the Track48 product range. Discover brand new products, practical additions to our range of accessories, and lights with new features to choose from. Our expanded product range offers you a variety of options.

● = White dynamic
 ● = 4,000 Kelvin
 ● = 3,000 Kelvin
 ● = 2,000 Kelvin
 ● = ColorSwitch (2,700K - 5,000K)

CONTOUR SPOTLIGHT SHAPE

NEW

48V | CRI>90 | 20W | Beam angle 30° | Luminous flux 500 lm

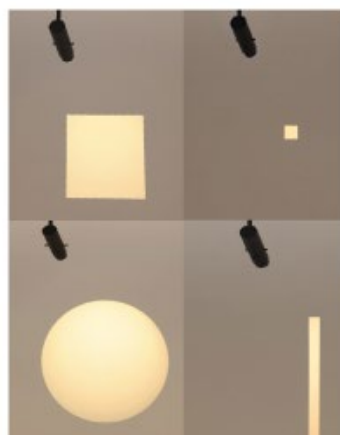

● ● DALI DT6 117430
● DALI DT6 117431

Our Shape contour spotlights enable you to precisely adapt the shape of the illuminated area to your object – rectangular, triangular, round, oval – for pinpoint lighting effects. The sophisticated lens optics of the spotlight with a beam angle of 30° ensure a sharply defined light area without scattered light.

Thanks to high color rendering, the color effect of the illuminated objects remains natural and authentic.

The spotlight can be integrated into dynamic lighting scenes via the DALI interface.

All of our products in the current range are free from harmful UV spectral components – so your artwork, textiles, and exhibits remain permanently protected and unaffected!

TRACK SPOTLIGHT SELECT

NEW

48V | CRI>90 | 8W | ColorSwitch 2700K / 3000K / 4000K / 5000K |

UGR<19 | Beam angle 18°/26°/36°/50°



- Standard **117085**
- DALI DT6 **117086**
- DALI DT6 **117087**

CAN BE COMBINED WITH HONEYCOMB COVER FOR SELECT SPOTLIGHTS

REDUCED GLARE UGR<16



117091



117088

With the Select track spotlight, both the beam angle and the light color can be individually adjusted, allowing for a wide range of customer-specific adaptations.

In addition, the honeycomb cover can be inserted into the spotlight to reduce glare to UGR<16.

The DALI signal can be connected to the two additional strands on the primary side of our Track48 inline transformers and looped through, or alternatively fed to the Track48 rail via our 4-pole power feeders together with the 48V DC voltage from an external transformer.

NEW

MINI LIGHTS 48V | CRI>90 | Beam angle 45°



Mini light
grid 34 cm

- Line+ 117096
- Line+ 117097
- Line+ 117098
- Line+ 117099



Mini light
linear 42cm

- Line+ 117100
- Line+ 117101
- Line+ 117102
- Line+ 117103



When combined with our Flat surface-mounted track, the luminaires fit seamlessly into the track. Their integration into our surface-mounted track gives the luminaires a stylish, recessed appearance.

Line+ stands for 'through-wiring', which in the case of mini lights means a two-pole contact on both sides. A Track48 Line+ light can therefore transmit the voltage from one track to the next.

BLUETOOTH SPEAKER 48V | 10W | IP20

NEW



● 117379



Bluetooth range: 10 m
Distance between transmitter and receiver: 20 m



The Track48 Bluetooth speaker can be operated in two modes: Host Unit and Sub Unit. Your Bluetooth device connects to the Host Unit, which forwards signals to the Sub Units. Tip: The best sound quality is achieved when the distance between two speakers is 1-1.5 meters.

CABLE SLEEVE

for Track48 pendant lights



● 116966

Simple and flexible
cable shortening for
pendant lights



NEW

COVERS AT A GLANCE with LED flex strip

NEW



With our various covers, you can design your lighting entirely according to your taste. Whether you want no light between the luminaires or continuous illumination via flex tape—the choice is yours and you have complete creative freedom.